

AllEdge
aluminium lawn edging

exceledge[®]
lawn edging & paver restraints

AL-P/100M

General Information:


Flexible premium aluminium edge restraint for soft landscape surfaces.

Applications:

To edge or demarcate lawn borders and other soft landscape applications.

Installation:

By mounting the edging using 300 mm aluminium stakes and backfilling with landscape surfacing. Optional stake lengths of 450 mm and 600 mm.

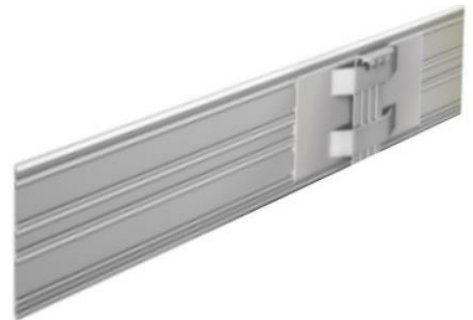

AL-P/100M

Suggested Specification:

AL-P/100M


AllEdge Premium Flexible edge restraint in 6063A grade aluminium.

Height: 100 mm

Thickness: 5 mm

Length: 2.5 m

Anchored with 300, 400 or 600 mm aluminium stakes (supplied) as required, every 840 mm or more if required. To be installed in accordance with Exceledge installation instructions.

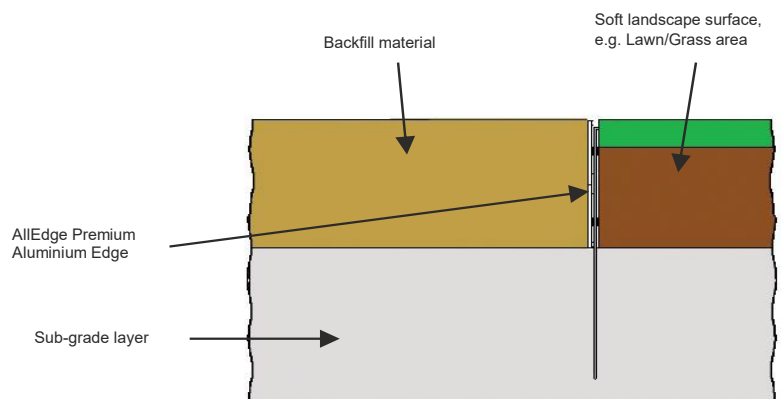

For further information contact:

Greenleaf 
landscape systems

Greenleaf Ireland

1a Carrakeel Drive, Maydown Industrial Estate
MAYDOWN BT47 6UQ

Tel 028 71345620

Email. info@greenleafireland.com