

Borderline

steel lawn edging



BL30

General Information:

Flexible steel edge restraint for soft landscape and loose aggregate pathways.

Applications:

To edge or demarcate lawn borders or loose aggregate surfaces.

Installation:

By mounting the edging using 305 mm flat stakes and backfilling with landscape surfacing. No haunching should be required.

Suggested Specification:

BL30

Borderline Flexible edge restraint in Brown powder-coated steel.

Height: 100 mm

Thickness: 3 mm

Length: 2 m

Anchored with 305 mm flat stakes (supplied) every 1 m approximately. To be installed in accordance with Exceledge installation instructions.

BL30G


Borderline Flexible edge restraint in Galvanised steel.

(Dimensions and fixings as above)

BL30U

Borderline Flexible edge restraint in Untreated steel.

(Dimensions and fixings as above).

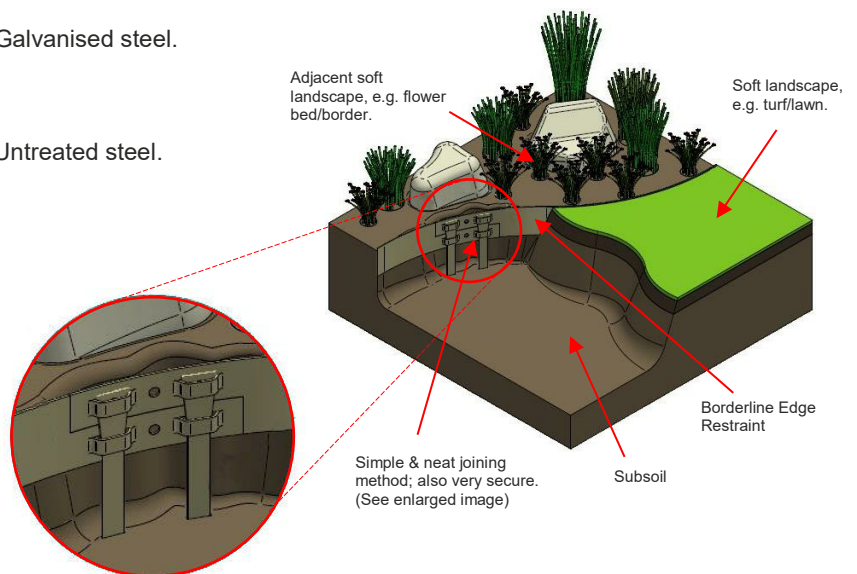

For further information contact:



Greenleaf Ireland

1a Carrakeel Drive, Maydown Industrial Estate
MAYDOWN, BT47 6UQ

Tel 028 71345620

Email. info@greenleafireland.com